


Rubber Fab

a Garlock Hygienic Technologies company

RFSG

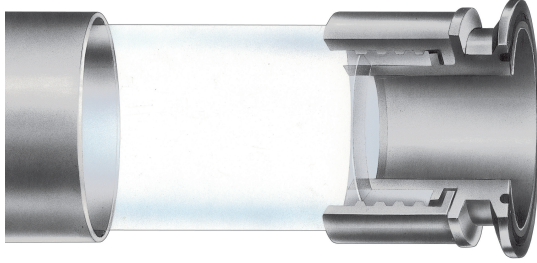

Non-Caged FEP Sight Gauge

TEMPERATURE: -25°F to 300°F

END CONNECTIONS: 316L stainless steel sanitary Tri-Clamp®
Consult factory for other end connection options

Part Number	Hose ID Inch	Hose OD Inch	Wall Thickness	Max. Working Pressure @ 70°F
08RFSG	0.50	0.75	0.125	150 psi
12RFSG	0.75	1.00	0.125	130 psi
16RFSG	1.00	1.25	0.125	125 psi
24RFSG	1.50	1.75	0.125	105 psi
32RFSG	2.00	2.35	0.175	72 psi
40RFSG	2.37	2.65	0.140	50 psi
48RFSG	2.87	3.23	0.180	40 psi
64RFSG	3.87	4.28	0.202	30 psi

Note:

ID is nominal bore only. Consult factory for fitting ID dimension.
Rubber Fab recommends a Rubber Fab factory crimp for this product.

Features

- Liquid level indicators
- Sturdy, favorable in high stress applications
- High and low temperature rated
- Smooth, non-stick surface cleans easily and promotes minimal pressure drop
- Non-contaminating
- Will not impart taste or odor
- Shatterproof tube
- Will not discolor
- Unaffected by ultraviolet or sunlight

Certifications

- 3-A Sanitary Standards
- USDA
- FDA
- USP Class VI



26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com